

INTEGRITY - SERVICE - VALUE

ALLEGIANCE INDUSTRIAL SUPPLY



(209) 646-9755

customerservice@allinsupplyco.com

3157 Humphrey Court, Turlock, CA 95380

JULY - AUGUST - SEPTEMBER
Q3 2024



SKU:
101-VSC110

Clear Frameless Safety Glasses



Lens Material: Polycarbonate
Frame Color: Clear
Resistance: Scratch Resistant

Multi-Purpose Scrubbing Wipes

SKU:
103-360726



W x L per Sheet: 10 in x 12 in
Quantity: 72 Sheets Per Canister
Packing Type: Canister

ANCHOR



25 Person First Aid Kits

Height: 3 in

SKU	Case Material	Length	Width
101-25-3-FAKP	Plastic	10 in	7 in
101-25-9-FAKP	Plastic	10 in	7 in
101-25-3-FAKM	Metal	11 in	7.5 in
101-25-9-FAKM	Metal	11 in	7.5 in



Headgear Sweatbands

Used With: Suspension Headgear

Strap Type: Hook and Loop

SKU	Color	Material
101-SB320V	Orange	Fleece Cotton



Multiple Use Tarps

Material: Polyethylene

Thickness: 5 mil

Resistance: Fade; Rot and Rust Proof; Sun

Color: Blue

SKU	Length	Width
101-0608	8 ft	6 ft
101-0810	10 ft	8 ft
101-1012	12 ft	10 ft
101-1016	16 ft	10 ft
101-2020-TARP	20 ft	20 ft



3-Pc Rainsuits

Color: Yellow

Material: PVC Over Polyester

SKU	Size Group
101-9000-M	Medium
101-9000-L	Large
101-9000-XL	X-Large
101-9000-2XL	2X-Large
101-9000-3XL	3X-Large
101-9000-4XL	4X-Large

ANCHOR



Oil-Based Non-Sanded Floor Sweeping Compounds

Color: Red
Odor/Scent: Slight Paraffinic



Creme Beads Granular Detergents

Capacity Wt.: 100 lb

SKU	Capacity	Packing Type
103-FLOOR-SWEEP	50 lb	Box

SKU	Packing Type
103-AB-CB100	Drum



Easy to Read Tape Measures

Test & Approvals: Meets or Exceeds Federal and ANSI Specifications
Graduations: 1/8 in
Blade Material: Steel
Blade Finish: Painted
End Type: Hook
Case Material: ABS
Return Motion: Spring
Type: Single Side Tape

SKU	Blade Length	Blade Width	No. of Scales	Color
103-43-113	12 ft	1/2 in	1	Chrome
103-43-119	16 ft	3/4 in	1	Chrome
103-43-123	25 ft	1 in	2	Chrome
103-43-129	25 ft	1 in	1	Orange



Coco Mats

Height: 1-1/2 in
Material: Densely Woven Fibers
Color: Natural Tan

SKU	Length	Width
103-AB-GDN-3	30 in	18 in
103-AB-GDN-5	36 in	22 in



1.5% Lanthanated Tungsten Electrodes

SKU	Dia.	Length
900-187GL	1/8 in	7 in
900-1167GL	1/16 in	7 in
900-3327GL	3/32 in	7 in



2% Thoriated Tungsten Electrodes

SKU	Dia.	Length
900-1/16-7GT2	1/16 in	7 in
900-3/32-7GT2	3/32 in	7 in
900-1/8-7GT2	1/8 in	7 in



ER70S-6 MIG Premium Welding Wires

Test & Approvals: AWS A5.18:05; CSA W48:14
Material: Carbon Steel
Tensile Strength: 85,000 psi
Wt.: 44 lb



2% Lanthanated Tungsten Electrodes

SKU	Dia.	Length
900-187GL2	1/8 in	7 in
900-1167GL2	1/16 in	7 in
900-3327GL2	3/32 in	7 in



E3 Tungsten Electrodes

SKU	Dia.	Length
900-187GE3	1/8 in	7 in
900-1167GE3	1/16 in	7 in
900-3327GE3	3/32 in	7 in



ER70S-6 MIG Welding Wires

Test & Approvals: ASME; SFA; AWS A5.18
Material: Carbon Steel
Tensile Strength: 550 MPa

SKU	Dia.	Wt.
900-70S6035X33-BOX	0.035 in	33 lb
900-70S6035X33-PLT	0.035 in	2,376 lb
900-70S6035X44-PLT	0.035 in	2,640 lb
900-70S6045X44-PLT	0.045 in	2,640 lb



MIG Contact Tips

Material: Copper

SKU	Tip I.D.	Wire Size	Overall Length
Miller® M15; M25/25M; M40/40AL			
900-000-067	0.038 in	0.030 in	1.125 in
900-000-068	0.044 in	0.035 in	1.125 in
900-000-069	0.054 in	0.045 in	1.125 in
Best Welds® 250/400; Tweco® No 2, 3 and 4			
900-14H-35	0.044 in	0.035 in	1.5 in
900-14T-35	0.044 in	0.035 in	1.5 in
900-14-35	0.044 in	0.035 in	1.5 in
900-14-45	0.054 in	0.045 in	1.5 in
900-14H-45	0.054 in	0.045 in	1.5 in
Best Welds® 135; Tweco® Mini® and No 1			
900-11-35	0.044 in	0.035 in	1.0 in



MIG Gun Nozzles

SKU	Nozzle Style	Bore Size
Best Welds® 135, Tweco® Mini®/No 1		
900-21-50	1/8 in Recess; Self-Insulated	1/2 in
Best Welds® 250/400; Tweco® No 2, 3 and 4		
900-23-62	1/8 in Recess, Self-Insulated	5/8 in
900-23T-37	1/8 in Recess, Tapered, Self-Insulated	3/8 in
Best Welds® 250; Tweco® No 2		
900-22-50	Adjustable	1/2 in
Best Welds® 400; Tweco® No 4		
900-24A-62	Adjustable	5/8 in
900-24CT-62S	Coarse Thread	5/8 in



MIG Liners

Used With: Tweco® Style No 3 and 4; Best Welds 400 A

SKU	Length	Wire Size	Wire Size
900-44-116-15	15 ft	0.052 in	1/16 in
900-44-116-25	25 ft	0.052 in	1/16 in
900-44-3545-15	15 ft	0.035 in	0.045 in



MIG Guns For Miller® Consumables

Welding Amp @ Duty Cycle: 250 A @ 80%; 280 A @ 60%

Wire Size: 0.030 in - 0.035 in

Cable Length: 15 ft



MIG Guns For Tweco® Consumables

Welding Amp @ Duty Cycle: 250 A @ 80%; 280 A @ 60%

Wire Size: 0.030 in - 0.035 in

Cable Length: 15 ft

SKU	Gas Type	Cooling Method
900-250M153035M	Argon/CO2	Air

SKU	Gas Type	Cooling Method
900-250153035M	Argon/CO2	Air


SPECIAL ORDERS
Don't see it here?
Just ask.





Welding Cables

Temp Range: -50° C (-58° F) - 105° C (221° F)
Jacket Material: EPDM
Number of Conductors: 1
Voltage: 600 V
Insulation: EPDM
Conductor Material: Stranded Copper

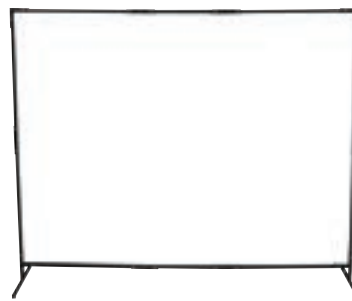

Curtain Frames

Test & Approvals: ISO 9001 manufacturer
Material: Steel
Color: Black
Includes: 1 in Square Steel Tubing; Bolted Brackets; 24 in Platform T Legs; Lacing Ties



Welding Blankets

Test & Approvals: Meets ANSI FM4950 1.4.3. Vertical applications with light-moderate exposures resulting from chipping, grinding, heat treating, sand blasting, and light horizontal welding
Material: Fiberglass

SKU	Cable/Wire Description	Insulation Thickness
911-1-250	1 AWG x 250 ft	0.06 in
911-1/0-250	1/0 AWG x 250 ft	0.08 in
911-2/0-250	2/0 AWG x 250 ft	0.08 in
911-1/0-500	1/0 AWG x 500 ft	0.08 in
911-2/0-500	2/0 AWG x 500 ft	0.08 in

SKU	Length	Width
902-CURTAIN-FRAME	6 ft	6 ft

SKU	Length	Width	Color
902-2025-18-6x6	6 ft	6 ft	White
902-2025-18-6x8	6 ft	8 ft	Tan
902-AC2300-24-6X8	6 ft	8 ft	Yellow



Rap-Around Pipe Templates

SKU	Size Group	Width	Length	Pipe Capacity
900-RA150	Small	2-1/2 in	2 ft	1 in - 3 in
900-RA160	Large	4 in	4 ft	3 in - 6 in
900-RA170	Large	4 in	6 ft	3 in - 10 in
900-RA179	Large	4 in	9 ft	6 in - 16 in
900-RA177	X-Large	4 in	7 ft	4 in - 12 in



Welding Curtains

Material: PVC

SKU	Length	Width	Color
902-CURTAIN-6X6-ORG	6 ft	6 ft	Orange
902-CURTAIN-6X8-GRN	8 ft	6 ft	Green
902-CURTAIN-6X8-ORG	8 ft	6 ft	Orange
902-CURTAIN-6X10-YEL	10 ft	6 ft	Yellow


GREAT SERVICE!

We can help you with selections and solutions.





Anti-Spatters
Physical Form: Liquid



Cold Zinc Galvanizing Primers
Packing Type: Aerosol Can
Temp. Range: 50° F - 90° F



Lube Pads
Physical Form: Solid

SKU	Capacity Vol.	Packing Type
905-620-160Z	16 oz	Aerosol Can
905-620-240Z	24 oz	Aerosol Can
905-D-500-1GAL	1 gal	Jug

SKU	Capacity Vol.
905-SPRAY-GALV-14	14 oz

SKU	Color
905-LUBE-PAD-6PK-TREATED	Silver
905-LUBE-PAD-6PK-PLAIN	White



Bright Zinc Galvanizing Primers



Coolant Fluids
Capacity: 1 gal
Package Type: Bottle



Headgear Sweatbands
Used With: Non-Suspension Headgear

SKU	Capacity Vol.	Price
905-RW109B-12	12.75 oz	\$11.90

SKU	Temp Range
905-16-25502	6 °F; -14 °C
905-16-25501	19° F to -7° C

SKU	Material
902-SB310V	FR Fleece Cotton



3M™ High Performance Green Masking Tape 401+

Roll Length: 55 m
Thickness: 6.7 mil

SKU	Material	Width
405-051115-64763	Crepe Paper	48 mm
405-051115-64759	Paper	0.47 in
405-051115-64760	Paper	0.71 in
405-051115-64762	Paper	1.41 in
405-051115-64764	Paper	2.8 in
405-051115-69109	Paper	0.24 in



3M™ Adhesive Remover Citrus Base 6041

Color: Pale Yellow

SKU	Fill Amount
405-021200-49048	18.5 oz



3M™ Aura™ Particulate Respirator 9211+

SKU
142-7100303148



3M™ Cubitron™ 3 Fibre Disc 1182C

Grit: 36+
Abrasive Material: Precision Shaped Ceramic
Body Material: Fiber
Applications: Beveling; Deburring; Heavy Grinding; Weld Removal

SKU	Dia.	Speed	Mounting
405-068060-66435	4.5 in	13300 RPM	Center Hole
405-068060-66440	4.5 in	13300 RPM	TN Quick Change
405-068060-66436	5 in	12000 RPM	Center Hole
405-068060-66441	5 in	12000 RPM	TN Quick Change
405-068060-66438	7 in	8600 RPM	Center Hole
405-068060-66442	7 in	8600 RPM	TN Quick Change



3M™ Cubitron™ 3 Fibre Disc 1187C

Grit: 36+
Abrasive Material: Precision Shaped Ceramic
Body Material: Fiber
Applications: Beveling; Deburring; Heavy Grinding; Weld Removal

SKU	Dia.	Speed	Mounting
405-068060-66455	4.5 in	13300 RPM	TN Quick Change
405-068060-66451	4.5 in	13300 RPM	Center Hole
405-068060-66456	5 in	12000 RPM	TN Quick Change
405-068060-66452	5 in	12000 RPM	Center Hole
405-068060-66453	7 in	8600 RPM	Center Hole
405-068060-66457	7 in	8600 RPM	TN Quick Change



3M™ General Use Masking Tape 201+

Width: 24 mm (0.94 in)
Roll Length: 55 m (60.14 yd)
Thickness: 4.4 mil


SKU	Material
405-511156-47406	Crepe Paper; Rubber Adhesive



3M™ GoggleGear™ 500 Series GG501SGAF

Lens Coating/Shade: Scotchgard™ Anti-Fog Coating
Lens Material: Polycarbonate
Frame Material: Plastic
Ventilation: Indirect

SKU
247-GG501SGAF-10



3M™ Heavy Duty Duct Tape 3939, Silver

Test & Approvals: Meets UL723, HUD, BOCA Codes
Length: 54.8 m
Thickness: 9.0 mil
Adhesion to Steel: 55 oz/in
Type: Heavy-Duty

SKU	Width	Tensile Strength	Wt.
405-021200-85561	24 mm	27 lb/in	0.74 lb
405-051131-06975	48 mm	25 lb/in	1.44 lb



3M™ Marine Adhesive Sealant 5200FC

Capacity: 295 mL

SKU	Full Cure Time @ Temp.
405-051135-06520	24 hr
405-051135-06580	24 hr
405-051135-06500	4 days



3M™ PELTOR™ Welding Earmuff H505B

Noise Reduction Rate (NRR): 22 dB



3M™ Scotchrap™ Vinyl Corrosion Protection Tape 50

Color: Black
Material: PVC
Thickness: 10 mil



3M™ Super 77™ Multipurpose Spray Adhesive

Tensile Strength: 300 psi
Chemical Compound: Synthetic Elastomer
Working Time: 15 sec to 15 min

SKU
247-H505B

SKU	Length	Width
500-157854	100 ft	6 in

SKU	Capacity vol.
405-021200-21210	16.75 oz



3M™ Performance Yellow Masking Tape 301+

Roll Length: 55 m (60.14 yd)
Thickness: 6.3 mil
Material: Crepe Paper; Rubber Adhesive



3M™ Scotchrap™ Pipe Primer

Applicable Materials: Most Metals



3M™ UV Resistant Green Masking Tape

Roll Length: 60.149 yd (55 m)
Thickness: 4.8 mil

SKU	Width
405-051115-64751	24 mm (0.94 in)
405-051115-64754	72 mm (2.83 in)

SKU	Capacity Vol.
500-427681	1 gal

SKU	Width
405-710367-73721	0.945 in (24 mm)
405-710367-73722	1.417 in (36 mm)
405-710367-73723	1.890 in (48 mm)



3M™ E-A-R™ Pistonz™ Earplugs P1400

Noise Reduction: 29 dB
Packing Type: Poly Bag
Body Material: Polyurethane



3M™ Speedglas™ Sweatband

Color: Black



3M™ DBI-SALA® ExoFit™ X100 Comfort Construction Safety Harness

Connection Type: Back D-Ring
Fastening Method: Quick-Connect; Torso Revolver
Load Cap.: 420 lb
Material: Aluminum Alloy; Zinc Plated Steel; Polyester

SKU	Type
247-P1400	Thumb-Grip; Uncorded
247-P1401	Corded

SKU	Used With
405-638060-43065	G5-01 Welding Helmets

SKU	Size Group
098-1401080	Small
098-1401081	Medium
098-1401082	Large
098-1401083	X-Large
098-1401084	2X-Large



3M™ DBI-SALA® ExoFit™ X200 Comfort Construction Safety Harness

Connection Type: Back D-Ring
Fastening Method: Tongue Buckle; Dual Lock Quick Connect
Material: Zinc Plated Steel; Aluminum Alloy; Polyester
Load Cap.: 420 lb

SKU	Size Group
098-1402066	Small
098-1402067	Medium
098-1402068	Large
098-1402069	X-Large
098-1402070	2X-Large



3M™ DBI-SALA® ExoFit™ X300 Comfort Construction Safety Harness

Connection Type: Back D-Ring
Fastening Method: Tongue Buckle; Auto-locking Quick Connect
Material: Aluminum Alloy/Zinc Plated Steel; Aluminum Alloy/ Stainless Steel; Aluminum; Polyester

SKU	Size Group	Load Cap.
098-1403048	Small	420 lb
098-1403049	Medium	420 lb
098-1403050	Large	420 lb
098-1403051	X-Large	420 lb
098-1403052	2X-Large	420 lb



3M™ DBI-SALA® Nano-Lok™ Personal Twin-Leg Self Retracting Lifeline

Load Capacity: 420 lb

SKU	Bottom Connector	No. of Legs
098-3100548	Rebar Snap Hook	2
098-3100523	Carabiner	1
098-3100529	Rebar Snap Hook	1
098-3100536	Rebar Snap Hook	1
098-3100521	Swivel Snap Hook	1
098-3100526	Snap Hook	1



Scotch-Brite™ Bristle Disc

Abrasive Material: Ceramic
Speed: 12000 RPM
Dia.: 4-1/2 in

SKU	Color	Arbor Diam
405-048011-24242	Yellow	5/8 in-12
405-048011-33054	Brown	5/8 in-11



Scotch-Brite™ Clean and Strip XT Pro TN Quick Change Disc

Roughness Grade: Extra Coarse
Arbor Diam: 5/8 in - 11


SKU	Speed	Dia.	Color
405-638060-05588	13300 RPM	4-1/2 in	Purple
405-638060-21050	13300 RPM	4-1/2 in	Green
405-638060-21055	8600 RPM	7 in	Green



ScotchBlue™ Original Painter's Tape 2090-24EC

Roll Length: 60 yd
Thickness: 5.4 mil

SKU	Width
405-051115-03681	1 in
405-051115-03686	2 in



Scotch® Box Sealing Tape 371

Thickness: 1.8 mil
Adhesion to Steel: 40 oz/in
Tensile Strength: 22 lb/in
Elongation: 160%
Material: Polypropylene/Resin
Wt.: 0.11 lb

SKU	Width	Length
405-021200-13679	48 mm	50 m



3M™ 510 1X36 VARNISHED CAMBRIC TAPE

Material: Fabric

SKU	Length	Width	Thickness
500-106876	36 yd	1 in	7 mil
500-048367	60 ft	3/4 in	8 mil

Ansell



58-201 Nitrile Coated Chemical Protective Gloves

Coating: Nitrile
Cuff Style: Gauntlet

SKU	Size Group	Lining
012-58-201-090	9	Acrylic



AlphaTec® 58-530B/58-535B Gloves

Coating: Nitrile
Style: AlphaTec™ 58-530B Gloves
Cuff Style: Gauntlet
Material: Acrylic Liner; Nitrile Coating

SKU	Size Group	Lining
012-58-530B-080	8	Knit Acrylic

HyFlex®



11-561 Cut Resistant Gloves

Size Group: 9
Material: Nitrile Coating Nylon Liner

SKU	Cuff Style
012-11-561-09	Knitwrist

HyFlex®



11-571 Nitrile-Coated Palm Cut-Resistant Gloves

Material: 15 ga Next Generation HPPE Knit
Size Group: 8

SKU	Cuff Style
012-11-571-080	Knit Wrist



11-645 Medium-Duty Cut Resistant Gloves

Size Group: 9

SKU	Material	Cuff Style
012-11-645-090	15 ga Knit	Knit Wrist



11-754 Cut Resistant Gloves

Size Group: 9
Material: Polyurethane; Nylon; Spandex

SKU	Cuff Style
012-11-754-09	Knitwrist

HyFlex®



11-818 Thin Work Gloves

Coating: Foam Nitrile
Style: Palm Coated
Cuff Style: Knitwrist
Material: Nylon; Lycra; Nitrile

SKU	Size Group	Lining
012-11-818-9	9	Nylon; Spandex



11-840 Nitrile Foam Palm Coated Gloves

Cuff Style: Knit-Wrist
Material: Nylon; Spandex; Foam Nitrile

SKU	Size Group	Lining
012-11-840-9	9	Nylon; Spandex



Cryogenic Use Single-Cylinder Carts

Width: 28 in
Height: 46 in

SKU	Load Cap.
021-87U-4	900 lb



Citrus Based Degreasers

Applicable Material: Garage; Home; Household Cleaning
Chemical Compound: D-limonene
VOC: <10%
Specific Gravity: 0.875

SKU	Capacity Vol.
108-16-CBD	16 oz



High Performance White Lithium Greases

Thickener: Lithium

SKU	Capacity Vol.
108-16-LG	11 oz



Non-Chlorinated Brake Cleaners

Chemical Compound: Acetone; Carbon Dioxide; Heptane

SKU	Capacity Vol.
108-20-BC	14 oz



PB™ Penetrating Catalysts

SKU	Capacity Vol.
108-16-PB-DS	11 oz



Silicone Lube

Temp. Range: -20° F - 250° F

SKU	Capacity Wt.
108-16-SL	11 oz



Breaker Lockouts

No. of Padlocks: 1

SKU	Type	Width	Used With
262-65965	Clamp-On	- 3/4 in	Single and Multi-Pole Breakers
262-65966	Clamp-On Circuit Breaker Lockout	- 3.253 in	Single-Pole



Electrical Lockout Tagout Kits

No. of Padlocks: 3

Includes: 1: 3-in-1 Plug Lockout ; 1: Clamp-on Circuit Breaker Lockout 480/600V; 1: Lockout Toolbox; 1: Wall Switch Lockout; 10: Lockout Tags; 10: Zip Ties; 2: 1in Lockout Hasps; 2: Clamp-on Circuit Breaker Lockout 120/277V; 2: Universal Multipole Breaker Lockout; 3: Nylon Safety Lockout Padlocks

SKU
262-153670



M210 Handheld Label Makers

Includes: M21 Label Printer; m23 Series Nylon Cloth Patch Panel and Wire Cable Labels

SKU
262-152260



SPC® Economy Portable Spill Kits

Absorption: 15 gal

Type: Oil Only

Includes: (10) 15 in x 19 in Pads; (2) 3 in x 4 ft SOCs; (1) Pair Nitrile Gloves; (1) Disposal Bag; Instruction Sheet

SKU	Width	Length
655-SK0-PP	16 in	20 in



ToughStripe™ Floor Marking Tapes

Width: 2 in
Length: 100 ft
Thickness: 0.008 in
Material: Polyester

SKU
262-104312



Oil Filter/PVC Pliers

Jaw Shape: Curved
Material: Forged High Carbon Steel

SKU	Overall Length
140-215-BULK	15.5 in



3.5 gal Industrial Concrete Funnel Top Sprayers

Operating Pressure: 40 to 60 psi
Hose Length: 48 in
Pump Type: Piston with Chemical-Resistant Seals and Gaskets
Handle Type: Tri-Lock Cap; D-Handle
Nozzle Type: Brass Fan-Tip
Body Material: Tri-Poxy® Steel
Applicable Materials: Concrete Additives; Form Oils
Includes: Tank; Brass Wand; Poly Holster; Reinforced Hose
Wt.: 8.25 lb

SKU	Capacity Vol.	Extension Length
139-1449	3-1/2 gal	Brass Wand 24 in



Crimpers

Handle Material: Plastic
Wt.: 15 oz

SKU	Capacities	Cable/Wire Size
140-909-BULK	22 to 10 AWG	10 AWG - 22 AWG



V-Jaw Tongue & Groove Plier Sets

Handle Type: Dipped
Material: Steel
Includes: 6-1/2 in V-Jaw; 9-1/2 in and 12 in Curved; V-Jaw; Tongue and Groove

SKU	Overall Length
140-VJ-3	6-1/2 in; 9-1/2 in; 12 in



3.5 gal Industrial Concrete Open Head Sprayers

Operating Pressure: 40 to 60 psi
Hose Length: 48 in
Color: Red
Pump Type: Piston with Chemical-Resistant Seals and Gaskets
Handle Type: Tri-Lock Cap; Ergo
Nozzle Type: Brass Fan-Tip
Body Material: Tri-Poxy® Steel
Applicable Materials: Concrete Additives; Form Oil
Includes: Tank; Brass Wand; Reinforced Hose
Wt.: 11 lb

SKU	Capacity Vol.	Extension Length
139-1949	3-1/2 gal	24 in

Oil Filter Pliers

Jaw Shape: Curved
Material: High Carbon Steel

SKU	Overall Length
140-212-BULK	12 in



Wire Strippers

Capacities: 10 to 22 AWG
Handle Material: Push-on Grip
Length: 8-1/4 in

SKU
140-908 140-958



Bleach and Disinfecting Sprayers

Operating Pressure: 40 to 60 psi
Extension Type: Straight Poly
Hose Length: 34 in
Pump Type: Piston
Handle Type: Poly Ergonomic
Nozzle Type: Adjustable Poly Cone
Body Material: Poly
Includes: 12 in Poly Extension; In-Tank Anti-Clog Filter

SKU	Capacity Vol.	Extension Length
139-20075	1 gal	12 in



Lawn and Garden Sprayers

Operating Pressure: 45 psi
Extension Type: Straight Poly Wand
Hose Length: 34 in
Pump Type: Universal PL Nitrile
Handle Type: Poly Shut-Off Assembly
Nozzle Type: Poly Adjustable Cone Nozzle
Body Material: Polyethylene

SKU	Capacity Vol.	Extension Length
139-20000	1 gal	12 in
139-20002	2 gal	18 in



20V MAX* LED Cordless Work Lights

Lumens: 110 lm
Type: Rechargeable Work Light
Includes: Tool Only

SKU
115-DCL040



General Purpose Sprayers

Operating Pressure: 40 to 60 psi
Handle Type: Ergonomic
Nozzle Type: Adjustable Poly; Coarse Stream/Fine Mist
Body Material: Polyethylene
Wt.: 12 oz

SKU	Capacity Vol.
139-1002	48 oz



Industrial Cleaner/Degreaser Hand Sprayers

Operating Pressure: 40 psi to 60 psi
Pump Type: Piston
Handle Type: Pistol
Nozzle Type: Adjustable Brass and Polypropylene Cones
Body Material: Polyethylene

SKU	Capacity Vol.
139-1046	48 oz



SureSpray™ Sprayers

Hose Length: 34 in
Handle Type: Poly-Ergonomic with Measuring Cup
Body Material: Polyethylene
Operating Pressure: 40 psi to 60 psi

SKU	Capacity Vol.	Extension Length	Nozzle Type
139-20010	1 gal	12 in	Adjustable Poly-Cone
139-20020	2 gal	12 in	Adjustable Poly-Cone
139-20030	3 gal	16 in	Cone; Fan



1-1/2 in Die Grinders

Watts: 350 W
Amps: 4.2 A
Speed: 25,000 RPM
Wheel Diam.: 1-1/2 in

SKU	Collet Size	Control Type
115-DWE4887	1/4 in	Paddle Switch with Lock-On Button
115-DWE4887N	1/4 in	Paddle; No-Locking



5.3HP Large Angle Grinders

Watts: 3950 W
Speed: 6000 rpm
Control Type: Lock-On; Trigger
Spindle Thread: 5/8 in-11

SKU	Wheel Dia	Amps
115-D28499X	7 in; 9 in	15 A



Brushless T27/T29 Small Angle Grinders

Watts: 1800 W
Speed: 9000 rpm
Control Type: 2-Stage Trigger
Spindle Thread: 5/8 in-11

SKU	Wheel Dia	Amps
115-DWE43265N	5 in; 6 in	13 A



FLEXVOLT® 20 V/60 V MAX* Batteries

Batt. Type: Lithium Ion
For Model: 20V, 60V, 120V MAX* all Tools

SKU	Batt. Cap.
115-DCB609-2	9 Ah



Medium Angle Grinders

Watts: 2250 W
Speed: 8500 RPM
Spindle Thread: 5/8 in to 11 in

SKU	Wheel Dia	Amps
115-DW840	7 in	13 A



Metal Cutting Saw Blades

Arbor Diam: 1 in
No. of Teeth: 66
Speed: 1800 RPM
Cutting Edge Material: Steel
Wt.: 3.12 lb

SKU	Blade Diam	Thickness
115-DWA7747	14 in	0.076 in



Small Angle Grinders

Watts: 850 W
Speed: 12000 rpm
Spindle Thread: 5/8 in - 11

SKU	Wheel Dia	Amps
115-DWE4011	4-1/2 in	7 Amp



MetMax® Full Safety Metatarsal Boots

Material: PVC; Steel Toe
Height: 15 in

SKU	Size Group
868-MZ2LE02.04	Men's 4
868-MZ2LE02.05	Men's 5
868-MZ2LE02.06	Men's 6
868-MZ2LE02.07	Men's 7
868-MZ2LE02.08	Men's 8
868-MZ2LE02.09	Men's 9
868-MZ2LE02.10	Men's 10
868-MZ2LE02.11	Men's 11
868-MZ2LE02.12	Men's 12
868-MZ2LE02.13	Men's 13
868-MZ2LE02.14	Men's 14
868-MZ2LE02.15	Men's 15



Purofort® RigPRO Full Safety Boots

Height: 10 in

SKU	Size Group
868-LJ2HR42-37	Men's 5/Women's 7
868-LJ2HR42-38	Men's 6/Women's 8
868-LJ2HR42-39	Men's 7/Women's 9
868-LJ2HR42-41	Men's 8/Women's 10
868-LJ2HR42-42	Men's 9/Women's 11
868-LJ2HR42-43	Men's 10/Women's 12
868-LJ2HR42-44	Men's 11/Women's 13
868-LJ2HR42-46	Men's 12/Women's 14
868-LJ2HR42-47	Men's 13/Women's 15
868-LJ2HR42-48	Men's 14/Women's 16



Tychem® 2000 Coveralls

Resistance: Abrasion; Chemicals; Flex Cracking; Puncture
Style: Serged Seams; Attached Hood; Elastic Wrists and Ankles; Zipper Front; Storm Flap

SKU	Size Group
251-QC127S-XL	X-Large
251-QC127S-2XL	2X-Large
251-QC127S-3XL	3X-Large



Tyvek® 400 Coveralls

Resistance: Hazardous Aerosols/Dry Particles; Non-Hazardous Light Liquid Splash
Applications: Agriculture; Asbestos Abatement; Environmental Cleanup; Food Processing; General Maintenance/Operations; Mold Remediation; Spray Painting; Wind Turbine Manufacturing

SKU	Size Group
Serged Seams; Attached Hood (Respirator Fit); Elastic Waist, Wrists, Ankles; Front Zipper; Storm Flap	
251-TY127S-M	Medium
251-TY127S-L	Large
251-TY127S-XL	X-Large
251-TY127S-2XL	2X-Large
251-TY127S-3XL	3X-Large
251-TY127S-4XL	4X-Large
Serged Seams; Collar; Elastic Waist; Zipper Front; Open Wrists and Ankles; Storm Flap	
251-TY120S-M	Medium
251-TY120S-L	Large
251-TY120S-XL	X-Large
251-TY120S-2XL	2X-Large
251-TY120S-3XL	3X-Large
251-TY120S-4XL	4X-Large
251-TY120S-5XL	5X-Large
Serged Seams; Collar; Elastic Waist, Elastic Wrists and Ankles; Zipper Front; Storm Flap	
251-TY125SWHMD002500	Medium
251-TY125S-L	Large
251-TY125SWHL002500	X-Large
251-TY125S-2XL	2X-Large
251-TY125SWH3X002500	3X-Large
251-TY125SWH4X002500	4X-Large



Tyvek® 400 Shoe & Boot Covers

Fastening Method: Low Elastic Top Opening

SKU	Size Group
251-FC450S	One Size Fits Most



Tyvek® 400 Sleeves

Width: - 10 in

Closure Type: Serged

Resistance: Aerosol; Particulates; Light Liquid Splash; Serged

SKU	Size Group	Length
251-TY500S	Standard	18 in



Safety Barricade Tapes

Width: 3 in

Length: 500 ft

Thickness: 7 mil

Material: Plastic

SKU	Depicted Text
272-76-0604	Danger



True Blue® Combination Squares

Graduation(s): 16ths, 32nds

No. of Scales: 1

Increment @ Scale: 1/16 in @ 1 in

Material: Steel

Wt.: 1/2 lb

SKU	Blade Length	Blade Width
272-e250	12 in	1 in



True Blue® Heavy-Duty Magnetic Torpedo Levels

Accuracy: 0.0005 in per in

No. of Vials: 3

Vial Positions: 45°; Level; Plumb

Base Type: Magnetic; V-Groove

Body Material: Aluminum

SKU	Length
272-em81.9	9 in



Plus Series Torches

Head Angle: 90°

Uses Cutting Tip: Series 1

For Model: WH 315FC+

SKU	Cutting Cap.	Length
341-0381-1928	8 in	10 in



Plus Series Welding Handles

Uses Cutting Tip: Series 1

For Model: CA 2460+; CA 2461+; CA 2462+

SKU	Length
341-0382-0093	9 in



Journeyman® EDGE 2.0 Cutting, Heating and Welding Outfits

Welding Range: - 3 in

Includes: CA 2460+ Cutting Attachment; Cutting Tip; Goggles; Heating Nozzle; Hose; Striker; Tip Cleaner; (2) 540/510 ESS32 Edge Regulators; WH 315FC+ Welding Handle; Welding Nozzles

SKU	Gas Type	Cutting Cap.
341-0384-2101	Acetylene	8 in



Journeyman® 450 Heavy Duty Cutting and Welding System

Welding Range: 3/4 in Cuts; 1/2 in Welds - 8 in Cuts; 3 in Welds

Includes: SR Series Regulators; Torch Handle with Flashback Arrestors and Check Valves; Cutting Attachment; Cutting Tips; Welding Nozzle

SKU	Gas Type	Cutting Cap.
341-0384-0807	Oxygen; Acetylene	2 in



Medalist® 250 Cutting Outfits

Welding Range: 5/64 in - 1-1/4 in

Includes: (1) Cutting Torch; (1) Fuel Gas Regulator; (1) Oxygen Regulator; (1) Hose; (1) Safety Goggles; (1) Striker; (1) Set of Cutting and Welding Tips

Type: Medium Duty

SKU	Gas Type	Cutting Cap.
341-0384-2580	Acetylene	5 in



Medalist® 350 Classic Welding and Cutting Outfits

Includes: (1) 1/4 in x 25 ft RM-Grade Hose with B Fitting; (1) Cutting Torch; (1) CGA 510 Fuel Gas Regulator; (1) CGA 540 Oxygen Regulator; (1) Handle has Built-in Check Valves and Flashback Arrestors; (1) Set of Cutting and Welding Tips; (1) Soft-Sided Safety Goggles; (1) Striker

SKU	Gas Type
341-0384-2698	Acetylene



Performer® EDGE™ 2.0 Welding & Cutting Outfits

Welding Range: 1/2 in Cuts; 1/4 in Welds - 1.25 in Cuts; 6 in Welds

Includes: (2) EDGE 2.0 Regulators; CA1350 Cutting Attachment; Cutting Tip; Goggles; Heating Nozzle; Hose; Striker; Tip Cleaner; WH100FC Welding Handle; Welding Nozzle

SKU	Gas Type	Cutting Cap.
341-0384-2125	Acetylene; Natural Gas; Propane	6 in



Ball Pein Hammers

Overall Length: 13.25 in

Handle Material: Steel

Grip Style: Blue Shock Reduction Grip®

Head Material: Steel

Finish: Polished

SKU	Head Weight
268-E3-16BP	16 oz



Estwing Drilling Hammers

Head Material: Steel

Handle Material: Steel

SKU	Overall Length	Head Weight
268-B3-3LB	11 in	3 lb



Welding Chipping Hammers

Handle Material: Steel

Head Material: Steel

Head Length: 7-1/2 in

SKU	Overall Length	Handle Type
268-E3-WC	11 in	Straight



20 oz Wide Mouth Bottles

Packing Type: Bottle

SKU	Package Yield	Flavor
308-32486	20 oz	Glacier Freeze
308-32488	20 oz	Riptide Rush
308-32866	20 oz	Fruit Punch
308-32867	20 oz	Orange
308-32868	20 oz	Lemon-Lime
308-20781	20 oz	Lemon-Lime; Orange;
308-32481	20 oz	Fruit Punch
308-32482	20 oz	Cool Blue
		Fierce® Grape



G Series 02 Perform® Thirst Quencher Instant Powders

SKU	Package Yield	Flavor
308-03928	32 oz	Lemon-Lime
308-03956	1 gal	Lemon-Lime
308-03957	1 gal	Orange
308-03808	1 gal	Fruit Punch
308-33677	2.5 gal	Glacier Freeze
308-03944	2.5 gal	Fruit Punch; Lemon-Lime; Orange; Frost
308-33672	6 gal	Riptide Rush
308-03967	6 gal	Frost Riptide Rush
		Lemon-Lime



G2 Low Calorie Thirst Quencher

Packing Type: Bottle

SKU	Package Yield	Flavor
308-12203	12 oz	Grape
308-20406	20 oz	Grape
308-12202	12 oz	Fruit Punch



Liquid Concentrates

Package Yield: 6 gal

SKU	Flavor
308-33305	Fierce® Grape
308-33977	Fruit Punch
308-03955	Orange
308-03984	Lemon-Lime



Powder Sticks

Package Yield: 16.9 oz

SKU	Flavor
308-04702	Fruit Punch
308-04701	Orange
308-04700	Lemon Lime



Thirst Quencher

Capacity Vol.: 12 oz

SKU	Flavor
308-12196	Fruit Punch
308-12937	Orange
308-12178	Lemon-Lime



0411 and 0411M Bright Plug Spiral Point Machine Taps

Material: High Speed Steel

Cutting Direction: Right

SKU	Thread Size	Threads Per Inch	Thread - TPI or Pitch	No. of Flutes
890-C62161	5/16 in	24	5/16-24 UNF	2
890-C62163	3/8 in	24	3/8-24 UNF	3
890-C62159	1/4 in	28	1/4-28 UNF	2
890-C62156	#10 to 32	32	32	2



402 and 402M Bright Straight Flute Plug Chamfer Hand Taps

No. of Flutes: 4

Cutting Direction: Right

Material: High Speed Steel

SKU	Drill Bit Dia.
890-C62034	1/4 in
890-C62042	5/16 in
890-C62058	7/16 in
890-C62050	3/8 in
890-C62066	1/2 in
890-C62074	9/16 in
890-C62090	3/4 in
890-C62022	0.19 in
890-C62082	5/8 in
890-C62098	7/8 in
890-C62106	1 in



Bit Barrel™ 1875R Heavy-Duty Black and Gold Mechanics Length Drill Sets

Includes: 1/16 in-1/2 in Bits in 1/64 in Increments; Round Plastic Index Case

Point Angle: 135°

SKU
890-C21165

Honeywell



New Perfect Fit Gloves

Material: Nylon

SKU	Size Group
068-NPF21-1118G-7/S	7/Small
068-NPF21-1118G-8/M	8/Medium
068-NPF26-9623G-8/M	8/Medium
068-NPF21-1118G-9/L	9/Large
068-NPF26-9623G-9/L	9/Large
068-NPF21-1118G-10/XL	10/X-Large
068-NPF21-1118G-11/XXL	11/2X-Large



Laser Lite® Disposable Earplugs

Noise Reduction: 32 dB

Body Material: Polyurethane Foam

Packing Type: Plastic Bag

SKU	Type
154-LL-1	Uncorded
154-LL-30	Corded



Prefilled Antimicrobial-Protected HL400 Dispensers for Earplugs

SKU	Used With	Color
154-HL400-LT-30-AM	Laser Trak	Blue/Orange
154-HL400-LL-30-AM	HL400-MAX-REFILL	Red/Yellow

Honeywell
HOWARD
LEIGHT
AUTHORIZED
DISTRIBUTOR



VeriShield™ 100 Series Passive Earmuffs

SKU	Noise Reduction Rate (NRR)	Color
154-1035100-VS	24 dB	Black
154-1035104-VS	26 dB	Black
154-1035108-VS	30 dB	Black
154-1035110-VS	30 dB	Hi-Viz Yellow

Honeywell
MILLER
AUTHORIZED
DISTRIBUTOR



H500 Construction Comfort Full Body Harnesses

Connection Type: Back/Front/Side D-Rings
Fastening Method: QC Chest/Leg Buckles
Material: Steel D-Rings

SKU	Size Group	Load Cap.
493-H5CC221122	Universal	420 lb



H500 Industry Standard Full-Body Harnesses

Fastening Method: Mating Chest Buckles; Tongue Leg Buckles
Material: Nylon/EVA Foam Shoulder Pads; Steel Hardware
Load Cap.: 420 lb

SKU	Size Group	Connection Type
493-H5ISP311022	Universal (L/XL)	Back/Side D-Rings
493-H5ISP111002	Universal (L/XL)	Back D-Ring
493-H5ISP311003	2X-Large	Back D-Ring

Honeywell
MILLER
AUTHORIZED
DISTRIBUTOR



H700 Full Body Harnesses

Material: Anodized Aluminum; Anodized Black Aluminum; Plated Black Brass; Stainless Steel
Load Cap.: 420 lb

SKU	Size Group	Connection Type	Fastening Method
493-H7IC1A1	Small/Medium	Back D-Ring	QC Chest/Leg Buckles
493-H7IC1A4	X-Large	Back D-Ring	QC Chest/Leg Buckles
493-H7IC1A3	2X-Large	Back D-Ring	QC Chest/Leg Buckles
493-H7IC1A2	Universal	Back D-Ring	QC Chest/Leg Buckles
493-H7CC2A1	Small/Medium	Back/Side D-Rings	QC Chest Buckle; Tongue Leg Buckles
493-H7CC2A3	2X-Large	Back/Side D-Rings	QC Chest Buckle; Tongue Leg Buckles
493-H7CC2A2	Universal	Back/Side D-Rings	QC Chest Buckle; Tongue Leg Buckles
493-H7CC3A2	Universal	Back/Side D-Rings	QC Chest Buckle; Tongue Leg Buckles
493-H7CC1A3	2X-Large	Back/Front/Side D-Rings	QC Chest Buckle; Tongue Leg Buckles
493-H7CC3A3	2X-Large	Back/Front/Side D-Rings	QC Chest/Leg Buckles
493-H7CC1A2	Universal	Back/Front/Side D-Rings	QC Chest Buckle; Tongue Leg Buckles
493-H7IC3A2	Universal	Back/Front/Side D-Rings	QC Chest/Leg Buckles

Honeywell
NORTH
AUTHORIZED
DISTRIBUTOR



5500 Series Low Maintenance Half Mask Respirators

Body Material: Elastomeric
Resistance: Biohazard; Chemical; Gas; Particulates; Vapor
Includes: Facepiece

SKU	Size Group
068-550030S	Small
068-550030M	Medium
068-550030L	Large

Honeywell
UVEX
AUTHORIZED
DISTRIBUTOR



Hypershock™ Safety Eyewear

Lens Material: Polycarbonate

SKU	Color	Lens Tint
Hardcoat		
763-S2949	Matte Black	Espresso Polarized
763-S2964	Smoke Brown	Gold Mirror
HydroShield™ AF		
763-S2940HS	Matte Black	Clear
763-S2970HS	Clear Ice	Clear

Honeywell
UVEX
AUTHORIZED
DISTRIBUTOR



Livewire® Sealed Eyewear

Lens Material: Polycarbonate
Lens Coating/Shade: HydroShield® Anti-Fog
Resistance: Fog; Scratch

SKU
763-S2600HS

IR Ingersoll Rand



300 Series Right Angle Die Grinders

Collet Size: 1/4 in; 6mm
Pressure: 90 psi
Hose Size: 3/8 in

SKU	Power Cap.	Free Speed	Noise Level	Length
383-301B	1/4 hp	21000 rpm	90 dB to 92 dB	5.27 in
383-302B	0.33 hp	20000 rpm	90 dB	6.93 in



300 Series Straight Die Grinders

Collet Size: 1/4 in; 6mm
Pressure: 90 psi
Hose Size: 3/8 in

SKU	Power Cap.	Free Speed	Air Consumption	Noise Level	Length
383-307B	1/4 hp	28000 rpm	6 CFM	83 dB	5.19 in
383-308B	0.33 hp	25,000 rpm	28 CFM	92 dB	6.85 in



MAX Series Angle Grinders

Spindle Thread: 5/8 in to 11
Power Cap.: 0.88 hp
Free Speed: 12,000 RPM
Air Consumption: 10 CFM
Control Type: Throttle Lever
Inlet Size: 1/4 in NPTF
Hose Size: 3/8 in
Applications: Cleaning
Wt.: 3.4 lb

SKU	Wheel Dia.
383-3445MAX	4-1/2 in



Classic Series Portable Corded Carbide Saw Blades

No. of Teeth: 24
Grind: ATB
Kerf: 0.087 in
Tooth Angle: 19°

SKU	Blade Diam	Arbor Diam
585-25130	7-1/4 in	5/8 in



Unibit® Titanium Fractional Self-Starting

No. of Steps: 12
Measurement Type: Fractional
Cutting Edge Material: HSS

SKU	Cutting Diam.	Material Thickness
585-15104	3/16 in - 7/8 in	3/8 in



Cross-Check™ Torque Seal® Tamper-Proof Indicator Paste

Temp. Range: -20° F - 400° F
Applications: Identifying Loose Nuts, Bolts, Fasteners and Assemblies
Full Cure Time @ Temp.: 1 to 2 hours

SKU	Capacity
253-83314	0.05 lb



Hand Cleaner Towels

W x L Per Sheet: 8 in x 12 in

SKU
253-42201



Hand Cleaner Towels

W x L Per Sheet: 10 in x 12 in

SKU	Quantity
253-42230	30/Container
253-42272	72/Container



Ratchet Tie-Down Straps

Length: 16 ft
Load Cap.: 1,000 lb
Break Strength: 3,000 lb

SKU	End Type	Width
130-05516	Double J-Hook with Added D-Ring	1 in



K1800 Industrial Roller Cabinets

No. of Drawers: 7
Slide Type: Ball-Bearing
Width: 27 in
Depth: 18 in
Height: 35 in
Caster Diam: 5 in
Material: 18/20 ga Steel

SKU	Capacity Vol.	Load Cap.	Color
444-277XR	8404 in ³	120 lb/Drawer	Red
444-277XB	8404 in ³	120 lb/Drawer	Brown Wrinkle



Mechanics' Chests

Width: 26-1/8 in
Depth: 12-1/8 in
Height: 14-3/4 in
Material: 20/22 ga Steel

SKU	Capacity Vol.	No. of Drawers
444-266B	3178 in ³	6



KleenGuard™ A35 Economy Liquid & Particle Protection Coveralls

Resistance: Liquid; Particles
Style: Attached Hood; Elastic Wrists and Ankles; Zipper Front

SKU	Size Group	Material
412-38939	X-Large	Microporous Film Laminate
412-38941	2X-Large	Microporous Film Laminate
412-38942	3X-Large	Microporous Film Laminate



KleenGuard™ Maverick™ Safety Glasses

Lens Material: Polycarbonate
Lens Coating/Shade: Anti-Fog; Anti-Scratch

SKU	Lens Tint
412-49309	Clear
412-49311	Smoke



WypAll® L30 Wipers

Scent: Unscented
Color: White

SKU	W x L per sheet	Quantity
POP-UP* Box		
412-05816	9.8 in x 16.4 in	120 Sheets per Box
412-03086	10 in x 10.8 in	120 Sheets per Box
412-05800	9.8 in x 16.4 in	100 Sheets per Box
Rolls		
412-05841	12.4 in x 13.3 in	950 Sheets per Roll
412-05843	10.4 in x 11 in	70 sheets per Roll
Quarterfold - Poly-packed.		
412-05812	12 in x 12.5 in	90 Sheets per Pack



Element™ Nitrile Exam Gloves

Thickness: 3.2 mil

SKU	Size Group
412-62870	X-Small
412-62871	Small
412-62872	Medium
412-62873	Large
412-62874	X-Large



KGA10 Lightweight Coveralls

Material: Spunbond Fabric
Style: Zip Front; Elastic Wrists; Open Ankle

SKU	Size Group
412-67303	Large
412-67304	X-Large
412-67305	2X-Large



KleenGuard™ A20 Breathable Particle Protection Coveralls

Material: MICROFORCE™ Barrier SMS

SKU	Size Group	Color
Zipper Front		
412-49004	X-Large	White
Elastic Wrists/Ankles; Zipper Front		
412-49104	X-Large	White
412-49105	2X-Large	White
412-58505	2X-Large	Blue Denim
Attached Hood; Elastic Back/Wrists/Ankles; Zipper Front with Storm Flap		
412-49114	X-Large	White
412-49115	2X-Large	White
412-49116	3X-Large	White
Attached Hood/Boots; Elastic Back/Wrists/Ankles; Zipper Front with Storm Flap		
412-49124	X-Large	White



V30 Nemesis™ Safety Glasses

Lens Material: Polycarbonate

SKU	Frame Color	Lens Tint
412-22611	Red	Smoke
412-19639	Blue	Light Blue
412-25676	Black	Clear
412-25688	Black	Smoke Mirror
412-25659	Black	Amber
412-19642	Black	Copper Blue Shield
412-25679	Black	Clear
412-22476	Black	Amber
412-14481	Black	Blue Mirror
412-22475	Black	Smoke
412-25692	Black	IRUV Shade 3
412-25671	Black	IRUV Shade 5
412-22609	Camouflage	Smoke
412-22610	Camouflage	Amber
412-22608	Camouflage	Clear
412-19644	Camouflage	Bronze
412-47378	Red	Clear
412-47383	Silver	Smoke
412-25685	Black	Indoor/Outdoor
412-47384	Metallic Blue	Clear
412-47387	Metallic Blue	Smoke



High Heat Paints

Temp. Range: 50° F - 85° F

SKU	Capacity Vol.
425-K01618777	16 oz



Metallic Paints

Temp. Range: 50° F - 85° F

SKU	Capacity Vol.
425-K01404777	16 oz Container



OSHA Safety Color Spray Paints

Temp. Range: 50° F - 75° F

Dry Heat Resistance: 150° F

SKU	Capacity Vol.	Color
425-K02116777	12 oz	Safety Red (OSHA)
425-K02410777	12 oz	Safety Orange (OSHA)
425-K02416777	12 oz	Safety Blue (OSHA)
425-K01813777	12 oz	Safety Yellow (OSHA)



Tough Coat® Advanced with Rust Barrier® Technology Spray Paints

Temp. Range: 55° F - 75° F

SKU	Capacity Vol.	Color
425-K00799008	15 oz	Black
425-K00829008	15 oz	Gray Primer
425-K00699008	15 oz	Red Oxide Primer
425-K00879008	15 oz	Dark Machinery Gray



Blast'EM™ Wasp and Hornet Killers

Insect Type: Flies; Mosquitoes; Moths; Wasps; Hornets; Yellow Jackets

SKU	Container Size
425-S00857000	16 oz



Dry Film Graphite Lubricants

Temp. Range: -40° F - 850° F

SKU	Container Size
425-SC0204000	10 oz



X60 Cloth Wipers

Scent: Unscented

SKU	Color	W x L per sheet	Quantity
POP-UP Box			
412-34790	White	8.34 in x 16.8 in	118 Sheets per Box
412-54015	White	11.1 in x 16.8 in	252 Sheets per Box
Roll			
412-34955	White	13.4 in x 12.4 in	1,100 Sheets per Roll
412-34965	Blue	13.4 in x 12.4 in	1,100 Sheets per Roll



Elite® Safety Glasses

Lens Material: Polycarbonate

SKU	Lens Tint	Lens Coating/Shade
412-21302	Clear	Anti-Fog
412-21303	Smoke	Uncoated
412-21305	Amber	Anti-Fog
412-21306	Indoor/Outdoor	Uncoated
412-21307	Blue Mirror	Mirror



Dry Moly Lubricants

Temp. Range: -30° F - 650° F

LU™206 All-Purpose Silicone Lubricants

Temp. Range: 50° F - 550° F

Silver Galv Coatings

Temp. Range: 400 °F MAX

SKU	Container Vol.
425-SC0200000	16 oz

SKU	Container Vol.
425-SC0206000	19 oz

SKU	Capacity Vol.
425-SC0739000	14 oz



General Purpose Cleaners

Removes: Grease; Fingerprints

LU™620 Anti-Seize Compounds

Temp. Range: 0° F - 2,200° F

SP™705 Non-Chlorinated Brake and Parts Cleaners

Removes: Brake Fluids; Dirt; Grease

SKU	Capacity Vol.
425-SC0880000	19 oz

SKU	Container Vol.
425-SC0620000	16 oz

SKU	Capacity Vol.
425-SC0705000	20 oz



LU™201 Open Gear & Wire Rope Lubricants

Temp. Range: 0° F - 450° F

Moly Chain Lubricants

Temp. Range: 50° F - 550° F

SP™915 Methylene Chloride Free Paint Removers

Removes: Coatings; Decals; Enamels; Epoxy; Lacquer; Shellac; Varnish

SKU	Capacity Vol.
425-SC0201000	12 oz

SKU	Container Vol.
425-SC0202000	16 oz

SKU	Capacity Vol.
425-S00915000	16 oz



The Protector™ LU711 All Purpose Lubricants

Flash Point: 140 °F

SKU	Capacity Vol.
425-SC0711000	11 oz



Quik Stik® All Purpose Solid Paint Markers

Length: 6 in
Temp. Range: 0° F - 392° F

SKU	Color
434-61053	Yellow
434-61069	Green



D-Handle Hand Trucks

Height: 50 in
Width: 19 in
Wt.: 25 lb

SKU	Load Cap.	Wheel Diam
310-30019	800 lb	10 in



Zinc-Rich Cold Galvanizing Compounds

Temp. Range: 400 °F MAX

SKU	Capacity Vol.
425-SC0740000	14 oz



Hydroblast® HB5 Safety Goggles

Lens Coating/Shade: MAX6® Anti-Fog Coating
Frame Material: Polycarbonate

SKU	Lens Tint
127-HB510PF	Clear
127-HB512PF	Gray



Pipe Wrenches

Material: Steel

SKU	Overall Length
495-48-22-7114	14 in
495-48-22-7118	18 in



Contractor RTV Silicone Sealants

Temp. Range: -49° F - 302° F
Full Cure Time @ Temp.: 24 h @ 77° F
Capacity: 10 oz

SKU	Capacity Vol.	Color
425-WL099110C	10 oz	Clear
425-WL099112W	10 oz	White



Predator® Mechanics Work Gloves

Material: 13-ga HyperMax® Shell; Polyurethane Coated; Nylon Stitched; PD6 Tire Tread
Cuff Style: Knit-Wrist

SKU	Size Group	Color
127-PD6951S	Small	Gray Knit/Coating
127-PD6951M	Medium	Gray Knit/Coating
127-PD6951L	Large	Gray Knit/Coating
127-PD6951XL	X-Large	Gray Knit/Coating
127-PD6951XXL	2X-Large	Gray Knit/Coating
127-PD6951XXXL	3X-Large	Gray Knit/Coating
127-PD6952S	Small	Black Coating; Salt/Pepper Knit
127-PD6952M	Medium	Black Coating; Salt/Pepper Knit
127-PD6952L	Large	Black Coating; Salt/Pepper Knit
127-PD6952XL	X-Large	Black Coating; Salt/Pepper Knit
127-PD6952XXL	2X-Large	Black Coating; Salt/Pepper Knit
127-PD6952XXXL	3X-Large	Black Coating; Salt/Pepper Knit



SHOCKWAVE Impact Duty™ PACKOUT™ Socket Sets

SKU	Measuring System
495-49-66-6806	SAE/MM

Sharpie



Fine Tip Permanent Markers

Tip Size: Fine
Tip Type: Bullet

SKU	Quantity
652-30162PP	2/PK
652-30101PP	6/PK
652-35010	36/CA
652-30051	144/CA

Sharpie



Twin Tip Permanent Markers

Tip Type: Fine; Ultra Fine

SKU
652-32001

Red Devil



100% Silicone Architectural Grade RTV Sealants

Temp. Range: -60° F - 400° F
Full Cure Time @ Temp.: 24 h @ 77 °F

SKU	Capacity	Color
630-0820	2.8 fl oz	Clear
630-0826/01	9.8 fl oz	Clear
630-0816/51	9.8 fl oz	Gray



King Size Permanent Markers

Tip Size: Large Chisel
Tip Type: Chisel

SKU	Color	Tip Size
652-2178476	Black	Large Chisel
652-15001A	Black	Large Chisel
652-15002	Red	King



Traverse™ Industrial Climbing Helmets

Material: ABS/ Polycarbonate
Suspension: HDPE

SKU	Color	Style
112-280-HP1491RVM-01	White	Vented
112-280-HP1491RM-01	White	Unvented
112-280-HP1491RM-11	Black	Unvented
112-280-HP1491RM-02	Yellow	Unvented



MaxiFlex® Ultimate™ Nitrile Coated Micro-Foam Grip Gloves

Material: Nitrile; Nylon with Lycra®

SKU	Size Group
112-34-874/S	Small
112-34-874/M	Medium
112-34-874/L	Large
112-34-874/XL	X-Large
112-34-874/XXL	2X-Large



ERGO EZ GRIP™ 7-in-1 Multi-Purpose Painter's Tools

Blade Material: Steel; Tungsten Carbide

SKU	Blade Width	Overall Length
630-6251	3 in	9 in



Mean Streak Permanent Marking Sticks

Tip Size: Extra Bold
Tip Type: Bullet

SKU	Color
652-85005	Yellow
652-85018	White

Polyurethane Triple Expanding Foam

Temp. Range: 55° F - 90° F
Full Cure Time @ Temp.: 24 h @ 77 °F

SKU	Capacity	Wt.
630-0909	12 oz	1 lb
630-0912	20 oz	1.85 lb



RD PRO® Heat Resistant RTV Sealants

Temp. Range: -60° F - 500° F

SKU	Capacity
630-0809/01	10.3 oz



ZERO Ready-To-Drink

Capacity Vol.: 20 oz

SKU	Flavor
690-159030800	Fruit Punch
690-159030801	Orange
690-159030803	Grape
690-159030804	Mixed Berry



Fast Pack® Drink Mixes

Capacity Vol.: 0.6 fl

SKU	Flavor
690-159015300	Mixed Berry
690-159015301	Cherry
690-159015302	Grape
690-159015304	Orange
690-159015305	Fruit Punch
690-159015306	Tea
690-159015309	Tropical Cooler
690-159015310	Cool Citrus



Gemini® Type 27 Grinding and Cutting Wheels

Speed: 13580 RPM

SKU	Dia.	Thickness
547-66252843593	4-1/2 in	1/4 in
547-66252843590	4-1/2 in	1/8 in
547-66252843591	4-1/2 in	1/8 in



Liquid Concentrate

Capacity Vol.: 64 fl

SKU	Flavor
690-159030319	Strawberry Lemonade
690-159030320	Mixed Berry
690-159030321	Cherry
690-159030322	Grape
690-159030323	Lemonade
690-159030324	Orange
690-159030325	Fruit Punch
690-159030328	Lemon-Lime
690-159030329	Tropical Cooler
690-159030330	Cool Citrus



Powder Packs

SKU	Capacity Vol.	Flavor
16EA/CA		
690-159016401	47.66 oz	Cherry
690-159016400	47.66 oz	Mixed Berry
690-159016402	47.66 oz	Cool Citrus
690-159016403	47.66 oz	Lemonade
690-159016404	47.66 oz	Orange
690-159016405	47.66 oz	Fruit Punch
690-159016406	47.66 oz	Grape
690-159016408	47.66 oz	Lemon-Lime
690-159016409	47.66 oz	Tropical Cooler
32EA/CA		
690-159016041	23.83 oz	Orange
690-159016042	23.83 oz	Fruit Punch
690-159016043	23.83 oz	Lemon-Lime
690-159016046	23.83 oz	Grape
690-159016048	23.83 oz	Mixed Berry
690-159016044	23.83 oz	Fruit Punch; Grape; Lemon-Lime; Orange
80EA/CA		
690-159016005	9.53 oz	Fruit Punch
690-159016006	9.53 oz	Grape
690-159016007	9.53 oz	Assorted Pack
690-159016008	9.53 oz	Lemon-Lime



Multi-Surface Disinfectants Degreasers

SKU	Capacity Vol.
889-311836	32 oz



ZERO Liquid Concentrate

Capacity Vol.: 64 fl

SKU	Flavor
690-159050102	Fruit Punch
690-159050103	Grape
690-159050104	Lemon-Lime
690-159050107	Orange
690-159050106	Mixed Berry



Ready-To-Drink

Capacity Vol.: 20 oz

SKU	Flavor
690-159030532	Grape
690-159030534	Orange
690-159030535	Fruit Punch
690-159030530	Mixed Berry
690-159030536	Strawberry Lemonade



Locking C-Clamps with Swivel Pads

Material: Alloy Steel

SKU	Overall Length
586-4SP	4 in
586-6SP	6 in
586-9SP	9 in
586-11SP	11 in
586-18SP	18 in
586-24SP	24 in



Bi-Metal SPEED SLOT® Hole Saws

Cutting Edge Material: HSS/Bi-Metal

SKU	Cutting Diam	Cutting Depth
433-3001212L	3/4 in	1-1/2 in
433-3001616L	1 in	1-1/2 in
433-3002020L	1-1/4 in	1-1/2 in
433-3006464L	4 in	1-1/2 in



48-pc Master Extraction Sets

Includes: (13) Bolt Extractors; (13) Multi-Spline Extractors; (16) Left-Hand Cobalt Drill Bits; (6) Spiral Flute Extractors

SKU	Extractor Screw Diam.
585-3101010	1/8 - 1/2 in; 1/4 in - 3/4 in; 5/64 - 1/2 in



Screw Extractor and Drill Bit Sets

Includes: Spiral EX1-EX6; Multi-Spline 1/8 in - 1/2 in; LH Cobalt Drill Bits 5/64 in - 1/2 in

SKU	Extractor Screw Diam.
585-11135ZR	EX-1 to EX -6; 1/8 in to 1/2 in



29-pc Black and Gold Metal Index Drill Bit Sets

Includes: 29-piece set in metal index case includes drill bit sizes 1/16 in to 1/2 in in 1/64 in increments

SKU	Cutting Diam	Cutting Edge Material
585-3018005	1/16 in - 1/2 in	HSS



Traditional Carbon Utility Blades

No. of Cutting Edges: 1
Blade Shape: Trapezoid

SKU	Blade Tip Shape
586-2083200	Triangular Point



Bi-Metal SPEED SLOT™ Hole Saw

Cutting Edge Material: HSS/Bi-Metal

SKU	Cutting Diam	Cutting Depth
433-3002424L	1-1/2 in	1-7/8 in
433-3002828L	1-3/4 in	1-7/8 in
433-3003232L	2 in	1-7/8 in



General Purpose Bi-Metal Reciprocating Saw Blades

Material: Bi-Metal

SKU	Length	Width
433-20493B610R	6 in	3/4 in
433-20580810R	8 in	3/4 in
433-20583110R	12 in	3/4 in



Master-Band® Portable Band Saw Blades

Cutting Edge Material: Lenox Tuff Tooth®
Cutting Length: 44-7/8 in

SKU	Cutting Cap.
433-8011538EW14	3/16 in - 3/8 in
433-8011438EW1014	1/4 in - Larger than 1/4 in



Speed Handles

Handle Material: Alloy Steel

SKU	Drive Size	Overall Length
577-5280AG	3/8 in	17-1/2 in



Aligning Pry Bars

Tip Type: Chisel - Straight; Point - Straight Tapered
Stock Shape: Hex
Material: Tool Steel

SKU	Stock Size	Overall Length	Wt.
577-2116	1/2 in	16 in	0.81 lb
577-2120	5/8 in	18 in	1.25 lb
577-2124	3/4 in	24 in	2.6 lb
577-2125	7/8 in	30 in	4.72 lb



Master-Band® Band Premium Band Saw Blades

Cutting Edge Material: Matrix

SKU	Cutting Cap.	Cutting Length
433-8011238EW1418	1/8 in - 5/16 in	44-7/8 in



25 Blade Long Feeler Gauge Sets

Blade Length: 12 in
Blade Width: 1/2 in
Includes: (25) Long Blades 0.0015 in to 0.04 in; Steel Holder

SKU	No. of Blades
577-000TL	25



Punch and Chisel Holders

SKU	Overall Length
577-2108	8 in



Standard Hole Saw Arbors

Cutting Edge Material: Hardened Carbon Steel

SKU	Cutting Diam	Used With
433-1779774	9/16 in to 1-3/16 in	9L-19L Hole Saws
433-1779801	1-1/4 in to 6 in	20L to 96L Hole Saws



4 Pc Pry Bar Sets

Includes: (2) Aligning Pry Bars; (2) Rolling Head Bars
Handle Type: Tapered
Material: Alloy Steel

SKU	Overall Length	Stock Shape
577-2100	18 in; 24 in; 12 in; 16 in	Hex



Extractor Sets

Material: Steel

SKU	Extractor Screw Diam.	Includes
577-9500A	1/8 in; 3/16 in; 7/32 in; 5/16 in; 3/8 in	Pouch
577-9500B	1/8 in; 3/16 in; 7/32 in; 5/16 in; 3/8 in; 7/16 in; 17/32 in; 5/8 in; 3/4 in; 1 in	Blow Molded Box



Torqueplus™ Impact Socket Sets

Drive Type: Impact
Material: Alloy Steel

SKU	Drive Size
577-72103	3/4 in



FatMax® Aviation Snips

Cut Type: Shear Cut
Length: 9-21/32 in
Jaw Material: Chrome Molybdenum Steel
Handle Type: Bimaterial; Slip Resistant
Handle Material: Bi-Material

SKU	Cutting Cap.	Cutting Length
680-14-563	18 ga Cold-Rolled Steel; 23 ga Stainless-Steel	1-1/2 in



QuickChange™ Retractable Utility Knives

Blade Length: 2-7/16 in
Blade Style: Retractable
Blade Material: Carbon Steel
Includes: (3) 11-921 1992® Heavy-Duty Blades

SKU	Handle Length	Overall Length
680-10-499	6 in	6-3/8 in



14 Piece Combination Wrench Sets

Material: Steel
Includes: Pouch Organizer
Measuring System: SAE

SKU	Opening Size
576-85-990	3/8 in; 7/16 in; 1/2 in; 9/16 in; 5/8 in; 11/16 in; 3/4 in; 13/16 in; 7/8 in; 15/16 in; 1 in; 11/16 in; 1 1/8 in; 1 1/4 in



Open Reel Fiberglass Long Tapes

Graduations: 1/8 in
End Type: Folding Hook
Materials: ABS Plastic, Nylon

SKU	Blade Length	Blade Width
680-34-790	100 ft	1/2 in



Retractable Pocket Cutters

Blade Material: Carbon Steel
Blade Tip Shape: Pointed
Includes: Quick-Point blade

SKU	Handle Length	Overall Length
680-10-143P	6 in	6 in



COMPO-CAST® Standard Soft-Face Hammers

Head Material: Polyurethane Over Steel

SKU	Head Weight	Head Length
680-57-532	21 oz	4-1/4 in
680-57-533	42 oz	4-3/4 in
680-57-534	52 oz	5-1/2 in



Powerlock® Tape Rules Wide Blade

Blade Material: Steel

SKU	Blade Length	Blade Width	End Type
680-33-116	16 ft	3/4 in	Hook
680-33-428L	26 ft	1 in	3-Rivet Hook



Rubber Mallets

Overall Length: 13-1/2 in
Head Material: Rubber
Handle Material: Hardwood

SKU	Face Diam
680-57-522	2-3/8 in



Self-Retracting Utility Knives

Blade Length: 2-1/8 in
Blade Style: Self-Retracting
Blade Material: Carbon Steel
Includes: (1) 11-987 Blade

SKU	Handle Length	Overall Length
680-10-189C	5-7/8 in	5-7/8 in



Heavy-Duty Style Hi Jacks

Height: 28 in - 49 in
Material: Carbon Steel

SKU	Load Cap.	Pipe Diam.
432-780375	2500 lb	1/8 in - 36 in



Stud Master FlexFit Hats

SKU	Size Group
961-SMFF	One Size



Fold-A-Jack® Style Hi Jacks

Height: 28 in - 49 in
Material: Carbon Steel

SKU	Load Cap.	Pipe Diam.
432-781300	2500 lb	1/8 in - 24 in
432-781301	2000 lb	1-1/4 in - 24 in



Heavy-Duty Style Lo Jack Stands

Height: 21 in - 36 in
Material: Steel

SKU	Load Cap.	Pipe Diam.
432-780385	2500 lb	1/8 in - 36 in



Stud Master Precision Framing Tools

Material: Steel

SKU	Style
961-SM12-S	Stud Master 12
961-SM24-S	Stud Master 24
961-SM16-S	Stud Master 16
961-SM14PD-S	Stud Master 16



Fold-A-Jack® Style Lo Jacks

Height: 21 in - 36 in
Material: Steel

SKU	Load Cap.	Pipe Diam.
432-781310	2500 lb	1/8 in - 24 in



Qwik Pins

Hole Diam: 5/8 in - 1-5/8 in
Includes: Two Pins

SKU	Material	Pin Type
432-781235	Steel	Qwik



Specialist® Gel Lubes No-Drip

SKU	Capacity Vol.
780-300103	10 oz



Flexible Pigtails

Connection Type: Female Brass
Pressure: 3000 psig

Hose Repair Kits

Hose I.D.: 3/16 in; 1/4 in Plain 5111

Quick Connect Sets

Connection Type: Torch-to-Hose
Material: Brass
Used With: B-Size Welding and Cutting Equipment
Gas Type: Fuel Gas; Oxygen

SKU	Gas Type	Size	SKU	Size	SKU	Includes
312-PF-4-36	Oxygen	1/4 in	312-CK-5	B-Size	312-QDB10 312-QDB20	QDB11; QDB12 QDB21; QDB22



BEST WELDS®

ANCHOR BRAND®



B-LINE®

GREAT VALUE, PERFORMANCE & RELIABILITY AT A GREAT PRICE



BEST WELDS®

WELD WITH CONFIDENCE


High quality welds when used on dirty, oily, or rusty steel. Creates a smooth bead appearance resulting in minimal post-weld grinding and provides porosity free, x-ray quality weld.

ER70S-6 MIG Welding Wires

SKU	Dia.	Tensile Strength
900-70S6023x11	0.023 in	550 MPa
900-70S6023X2	0.023 in	550 MPa
900-70S6030x11	0.030 in	550 MPa
900-70S6030x33	0.030 in	550 MPa
900-70S6035x11	0.035 in	550 MPa
900-70S6035X550	0.035 in	550 MPa
900-70S6035X33-PLT	0.035 in	550 MPa
900-70S6035X33-BOX	0.035 in	550 MPa
900-70S6035X44-PLT	0.035 in	550 MPa
900-70S6035X44-BOX	0.035 in	550 MPa
900-70S6045X550	0.045 in	550 MPa
900-70S6045X33-BOX	0.045 in	550 MPa
900-70S6045X33-PLT	0.045 in	550 MPa
900-70S6045X44-BOX	0.045 in	550 MPa
900-70S6045X44-PLT	0.045 in	550 MPa
900-70S6045X11	0.045 in	550 MPa
900-70S6052X44	0.052 in	77 psi
900-70S6052X550	0.052 in	77 psi



ER70S-6 TIG Welding Rods

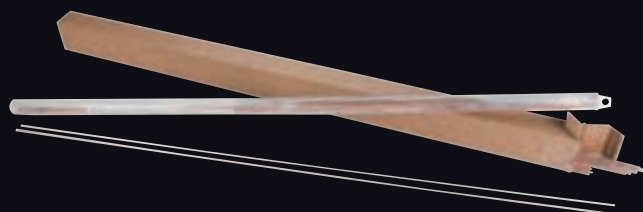

SKU	Tensile Strength	Dia.
900-70S6116X36X10	550 MPa	1/16 in
900-70S618X36x10	550 MPa	1/8 in
900-70S6332X36X10	550 MPa	3/32 in
900-70S6532x36x10	77 psi	5/32 in

DISPENSERS



315-8328-E1

315-8324-E1

315-8320-E1



315-8338-E1

315-8334-E1

315-8330-E1

PURELL® ES10 TOUCH FREE

Hand Sanitizer

Hand Soap

- Slim design fits in tight spaces.
- Transparent refills make it easy to check product levels without opening the dispenser.
- Most sustainable touch-free dispensing system.

REFILLS



315-8353-02

315-8351-02

315-8351-02-CV



315-8385-02

315-8371-02



315-8383-02

315-8382-02

PURELL® ES10 TOUCH FREE Professional CRT Healthy Soap®

Healthcare Advanced Hand Sanitizer

Antimicrobial Foaming Hand Soap

- Advanced, fragrance-free hand sanitizer made with naturally renewable ethanol.
- Dye-free & fragrance-free.

- **Clean Release™** Technology reaches into skin's cracks and crevices.
- Free of harsh preservatives, antibacterials, parabens, phthalates, fragrance, and dye.
- **Sanitary Sealed™** PET refill is easily recycled.

- Effectively kills germs and cares for hands, even with frequent use.
- Specially formulated refreshing foam is proven to be as mild as our top-selling non-antimicrobial soap.

simple green®



INDUSTRIAL CLEANER AND DEGREASER

- All-purpose cleaner, degreaser, and deodorizer
- Concentrate dilutes up to 1:30
- Easily cuts through thick grease, oils, hydraulic fluids, and built-up grime on all washable surfaces.
- Non-abrasive, non-caustic and non-flammable
- Recognized by the U.S. EPA's Safer Choice program for its use of safer chemistry.
- Can be used in cleaning equipment including floor scrubbers, carpet cleaners and parts washers.

SKU	Capacity Vol.
676-2710001213012	24 oz
676-2710200613005	1 gal
676-2700000113006	5 gal
676-2700000113008	55 gal

CRYSTAL SIMPLE GREEN

- Effective concentrated cleaner and degreaser for industrial and manufacturing applications
- Suitable for critical cleaning tasks that demand a fragrance-free solution
- High rinsability factor meets requirements for cleaning in cosmetic, medical and pharmaceutical environments
- Powerful, all-purpose cleaning and degreasing with no added color or scent.
- Food Production Item with NSF A1 approval

SKU	Capacity Vol.
676-0610001219024	24 oz
676-0610000619128	1 gal
676-0600000119005	5 gal
676-0600000119055	55 gal



MANUFACTURER INDEX

3m™ 8-10	Estwing® 17	Milwaukee Hand Trucks 24	Talon 30
Anchor 2-3	Fantastik® 26	Milwaukee Tools® 24	Victor® 16
Ansell 11	Gatorade™ 16-17	Norton® 26	WD40® 30
Anthony Welded® 11	Honeywell® 18-19	PIP 25	Western 31
Best Welds 4-7	HyFlex® 11	Proto® 28	White Lightning® 24
B'laster® 12	Ingersoll Rand 19-20	Red Devil® 25-26	WypAll® 21-22
Brady 12-13	Irwin Tools® 20, 27	SCJohnson 27	
Channellock 13	Keeper™ 20	Scotch™ 10	
Chapin™ 13-14	Kennedy® 21	Scotch Brite 10	
Cle-Line® 18	Kimberly Clark Professional® 21	Scrubs® 20	
DeWalt® 14-15	Kimtech™ 21	Sharpie® 25	
Dunlop® 15	Kleenguard™ 21-22	Smith & Wesson® 22	
DuPont™ 15-16	Krylon® 22	Sprayon 22-24	
Dykem® 20	Lenox® 27	Sqwincher® 26-27	
Empire® 16	Markal® 24	Stanley® 29-30	
ESAB® 16	MCR Safety 24	Southwire Sumner® 30	



(209) 646-9755

customerservice@allinsupplyco.com


3157 Humphrey Court, Turlock, CA 95380

JULY - AUGUST - SEPTEMBER Q3 2024

SKU:
428-02016

TKX® All-Purpose Penetrant Lubricants and Protectants

Applications: Bearings; Cables; Chains; Castings; Dies; Molds; Forgings; Gears; Machines Stock; Machinery
Flash Point: 163 °F
Capacity Vol.: 11 oz

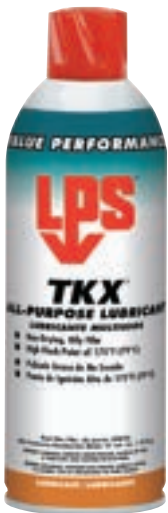

Chest Waders

Material: PVC; Nylon Suspenders; Steel Toe
Color: Black Boot; Gray Outsole
Lining: Non-Absorbent Cotton
Style: Steel Toe Chest Waders; Cleated Outsole
Height: 16 in Boot



SKU	Size Group	Height
868-8606700.06	Men's 6	31 in Inseam; 53 in Overall
868-8606700.07	Men's 7	33 in Inseam; 53 in Overall
868-8606700.08	Men's 8	33 in Inseam; 53 in Overall
868-8606700.09	Men's 9	33 in Inseam; 53 in Overall
868-8606700.10	Men's 10	34 in Inseam; 53 in Overall
868-8606700.11	Men's 11	34 in Inseam; 53 in Overall
868-8606700.12	Men's 12	35 in Inseam; 53 in Overall
868-8606700.13	Men's 13	35 in Inseam; 53 in Overall



SKU:
434-80221

Paintstik® Original B® Solid Paint Markers

Length: 4-3/4 in
Dia.: 11/16 in
Temp. Range: -50° F - 150° F
Flash Point: 204° C
Resistance: Weather; UV



G350 Series Cutting and Welding Outfits

SKU:
900-0384-2704

Welding Range: - 3 in
Cutting Cap.: 3/8 in to 6 in
Includes: CA370-V Cutting Attachment; WH370FC-V Welding Handle; 1-1-101 Cutting Tip; 2-UM-350 Welding Nozzle; G350-150-540 Oxygen Regulator; G350-15-510 Fuel Gas Regulator; 1/4 in x 25 ft RM Hose; Goggles; Striker
Gas Type: Acetylene; Oxygen

